

Zawór zwrotny KELLER z mosiężnym grzybkiem



PARAMETRY


T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+120°C	+1°C	1,0 MPa	ISO 228

MATERIAŁY

KADŁUB, WKRĘTKA, GRZYBEK: mosiądz

USZCZELKA GRZYBKĄ: uszczelka płaska - NBR

SPRĘŻYNA: stal nierdzewna

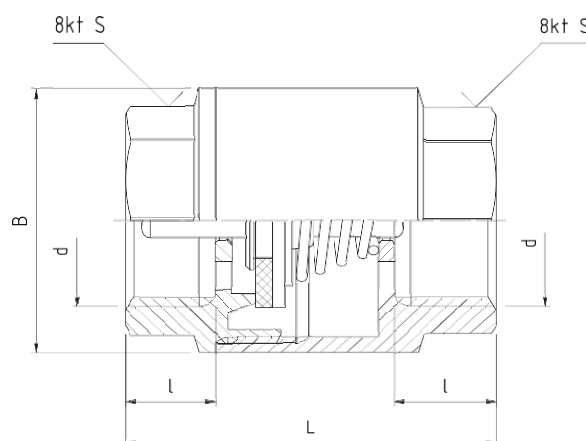

DANE TECHNICZNE

indeks	wielkość	DN	Q[m³/h]	Kv*[m³/h]	d	L	l	B	S
KEL 121501	½"	15	1,01	3,19	G½	45,5	11,0	32,5	26
KEL 121511	¾"	20	1,73	5,47	G¾	52,0	13,0	37,5	30
KEL 121521	1"	25	2,77	8,76	G1	54,0	13,5	44,0	37
KEL 121531	1¼"	32	4,93	15,59	G1¼	61,0	15,0	58,5	46
KEL 121541	1½"	40	7,42	23,46	G1½	70,0	16,5	66,5	52
KEL 121551	2"	50	10,12	32,00	G2	78,0	16,5	79,5	66

*Współczynnik Kv obliczony na podstawie wartości Q.
Wymiary w mm

WYKRES P-T

